

4415 HO GSR2™ Gas Fireplace



Introducing the 4415 HO GSR2 from Fireplace Xtrordinair

Fireplace Xtrordinair brings you the very best in home heating and style with its new gas fireplace, the 4415 HO GSR2. The 4415 HO (High Output) features a sleek, linear appearance while boasting an impressively high heat output. Not only is this fireplace a beautiful focal point in your home, it will heat up to 2,100 square feet with a long row of dancing flames and built-in fans. Turn on the under-lighting that shines through the translucent glass floor and you've got magic whether the fire is on or off. You can tailor the look of the 4415 to accompany any architectural style with a selection of fireback options, along with realistic Driftwood and Stone Fyre-Art to personalize it even more. This linear fireplace will add sophistication to any room.

Superior Craftsmanship

Behind the beautiful flame and high heat output of the 4415 is superior craftsmanship and quality safety features. The 4415 is built to extremely high standards at our factory located in Mukilteo, Washington. From the heavy steel thickness of the fireplace body to the durable, welded glass frame surrounding the ceramic glass, you are truly buying the finest gas fireplace available. Installed over the glass is a safety screen designed to prevent accidental contact with the hot glass surface, but not detract from the stunning fire view. These features have exceeded safety standards and allow you to heat your home in the best possible way. See the difference in quality and performance with the 4415 HO.

Power Heat Vent Kits

The 4415's heating power can be used to heat additional rooms in your home with the optional Power Heat Duct Kit. The kit consists of a 130 CFM fan and a 20 foot heat duct. You can add up to two kits to the 4415 which are controlled from the remote location.

Special Features

- Two 90 CFM Blowers (180 CFM total of hot air delivery)
- Huge glass viewing area - 13" H x 42" W
- Choice of three colors of translucent crushed glass media
- GreenSmart 2 handheld remote control, includes a Smart Thermostat, Accent Light control, heat output, and blower speed.
- Ten 35 watt accent lights under light the glass floor.
- Heavy steel construction includes Heavy-duty 10 gauge welded glass frame
- For extra safety a protective screen over the glass complies with future screen standards and prevents accidental contact and injury.
- 6 adjustable levels for fan, lights, and flame



Ledgestone Fireback and Bronze Crushed Glass






Black Enamel Fireback with Platinum Crushed Glass and Driftwood and Stone Fyre-Art option.



GreenSmart 2™ Remote Control Included

The GreenSmart 2 remote offers the ultimate in features and convenience from any location within 25 feet of your appliance.

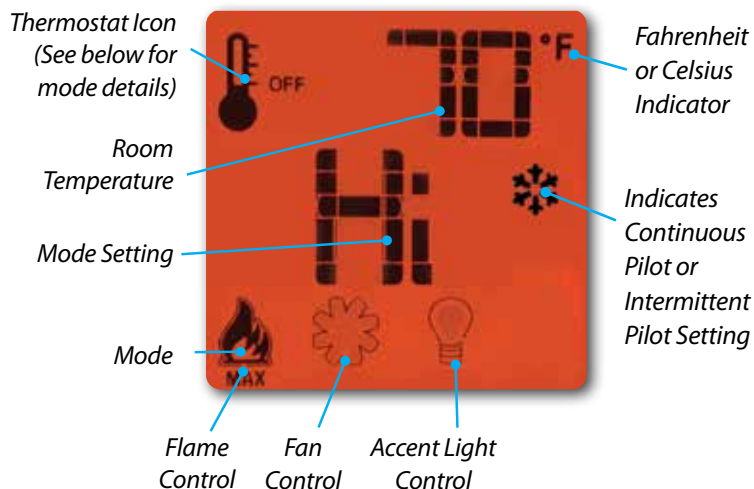

• Manual Setting

Manually turn the fire ON/OFF and adjust flame height.

• Standard Thermostat Setting

The thermostat control setting will turn the unit off when the desired room temperature is achieved, and will turn it back on as the room cools.

• “Smart” Thermostat Setting (Set-it-and-forget-it!)

In “Smart” Thermostat mode the flame will automatically modulate to a lower setting rather than turn the unit off as the room temperature approaches the desired setting. This “Smart” setting has the benefit of extending your fire viewing experience over conventional ON/OFF thermostats.

Firebacks (Required)

Choose from four unique options to line the firebox of your 4415.



Black Painted Fireback
Creates the illusion of a large, deep firebox.



Ledgestone Pattern Fireback
A naturally dramatic interior with three-dimensional shadowing from the flames.



Black Porcelain Enamel Fireback
Creates a rich flame reflection.



Stainless Steel Fireback
A bright metal reflection that develops a soft patina over time.

Decorative Glass Interior Floor (Required)

Once you've chosen your fireback, choose one of three different crushed glass colors for the floor of your fireplace.



Crushed Glass



Platinum Glass



Bronze Glass



Cobalt Glass

Interior Options

Although not required, the decorative interiors allow you to personalize your 4415 with a little added style.



Platinum Crushed Glass and Driftwood and Stone Fyre-Art Kit




Bronze Crushed Glass and Driftwood Log Set


NOTE: ALWAYS REFER TO THE PRODUCT OWNER'S MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS. FAILURE TO DO SO CAN RESULT IN VOIDING OF THE WARRANTY AND PRESENT A POTENTIAL SAFETY HAZARD!

MANUAL CAN BE FOUND AT WWW.FIREPLACEX.COM

Minimum Clearances To Combustibles

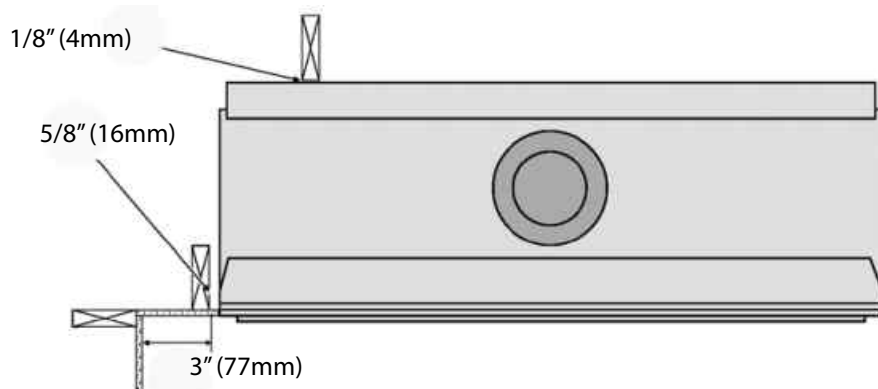

Minimum Framing Requirements

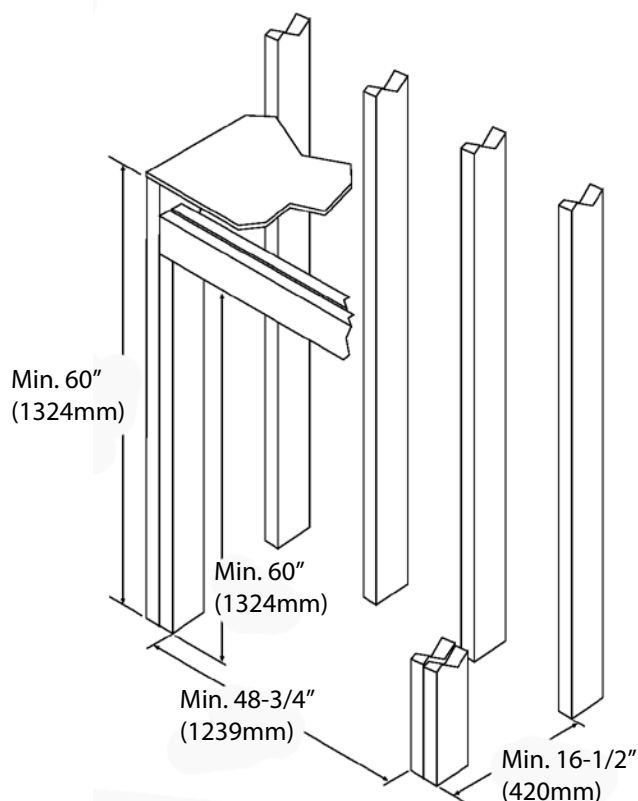

Fireplace Dimensions


DEPTH	16-3/4" (425 mm)
HEIGHT	37-3/8" (924mm)
WIDTH	47-5/8" (1210mm)

Specifications

- INPUT HIGH: 42,000 BTUs/Hr
- INPUT LOW: 28,200(NG) BTUs/Hr
21,413 (LP) BTUs/Hr
- P4 Efficiency: 63.35 % (NG)
63.88 % (LP)
- Heating Capacity:
Up to 2,100 Square Feet

* Heating Capacity will vary with floor plan and ceiling height, insulation, and outside ambient temperature.

† P4 Efficiency determined using CSA P4.1-02

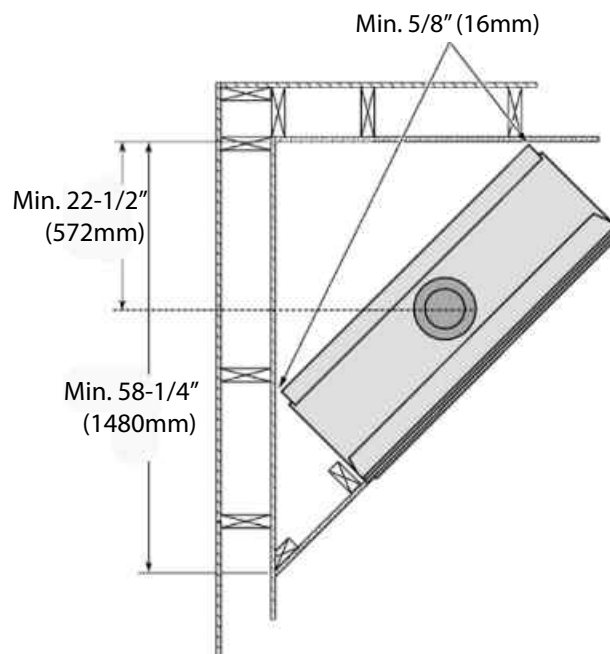

See our complete line of fireplaces
and inserts at: www.fireplacex.com