

PROBUILDER SERIES™

36 Clean Face Gas Fireplaces

FIREPLACE
XTRORDINAIR





Taking *Clean Face* Fireplaces to a Whole New Level

With the ProBuilder Series™ of Clean Face fireplaces you get MORE HEAT FOR LESS MONEY; that's more features and benefits than any other mid-sized modest heat output, value-priced gas fireplaces available, making them both a beautiful and economical way to heat your home.

The ProBuilder™ 36 Clean Face is designed to provide comforting radiant heat through the huge fireviewing glass, plus natural convection from the five-sided convection chamber, delivering optimum warmth throughout your home without the use of a fan.

The clean face style of these fireplaces features a sleek, understated trim rather than grills or facing. This look complements the tall, elegant profile and fire view of the ProBuilder 36. A simple black trim accentuates the flames, allowing the presentation of fire to stand out as the focal point in any room.

The three ProBuilder 36 Clean Face fireplaces are identical when it comes to size, construction and heating capacity. These models also feature the same dedication to quality and craftsmanship that our other Fireplace Xtrordinair® Premium fireplaces are so well known for.

- Heats Up to 1,150 Sq. Ft.
- Tempered Glass Fire Viewing Area: 32-3/4" W x 28-1/4"
- Nearly Invisible ANSI Approved Glass Safety Screen
- High Quality 16 and 18 Gauge Steel Construction

Each model, however, offers its own unique features to accommodate your particular needs and requirements.

ProBuilder 36 Clean Face MV

The Radiant Millivolt model features a Continuous Pilot system that keeps the pilot on at all times. This model is a great choice for anyone who desires a simple heat source that does not require power for operation.

ProBuilder 36 Clean Face GSB

The GreenSmart® Basic (GSB) model is an excellent energy-efficient choice. This model conserves fuel with a GreenSmart® pilot system that automatically turns on when heat is called for, and off when no heat is needed.

ProBuilder 36 Clean Face Deluxe

The Deluxe is our luxury full feature GreenSmart® model. This model includes your choice of beautiful high definition 10-piece Classic Oak or Birch Log Sets and Comfort Control™ making it our most luxurious and convenient to operate model.

Cover Image: The ProBuilder 36 CF Deluxe with Classic Brick fireback and the high definition 10 piece Birch Log Set.



The ProBuilder 36 CF GSB with the
Black Glass fireback, Ember-Glo™,
and CoolSmart TV Wall™

ProBuilder 36 Clean Face MV



Standard Features

- Millivolt Continuous Pilot
- Piezo Igniter
- ON/OFF Wall Switch
- No Power Required (*Batteries are required with optional remote. 110 V power is required with optional Fan or Ember-Glo™.*)
- Classic 8 Piece Log Set
- Easy Access Controls

Performance

- BTU Input Range: 13,000 to 25,000 NG - 12,000 to 24,000 LP
- Burner Turn Down: 50%
- P4 Efficiency: 73.77% NG 75.33% LP
- Steady State Efficiency: Up to 82.66% NG 84.06% LP



Access controls are below glass face. Contains Pilot Control, Flame Height Adjustment, Piezo Igniter and Burner ON/OFF.

ProBuilder 36 Clean Face GSB



Standard Features

- Continuous Pilot or Basic GreenSmart® Ignition Modes
- 110 V Power Required, Built-in Automatic Battery Backup
- Standard ON/OFF Wall Switch
- Classic 8 Piece Log Set
- Easy Access Controls

Performance

- BTU Input Range: 13,000 to 25,000 NG - 12,000 to 24,000 LP
- Burner Turn Down: 50%
- P4 Efficiency: 74.78% NG 76.41% LP
- Steady State Efficiency: Up to 82.66% NG 84.06% LP



Access controls are below glass face. Contains Flame Height Adjustment, Pilot Control and Burner ON/OFF.

Optional Accessories for ProBuilder 36 Clean Face MV & GSB

Basic GreenSmart® Wireless Thermostat Remote Control



Manual Setting

ON/OFF controls.

Thermostat Setting

Fireplace turns ON/OFF to maintain your desired home/room temperature.

Convection Fan

Variable speed 180 CFM* Fan helps increase the natural convection of heated air into the room as it circulates around the firebox and glass frame. Fan is manually controlled by a rheostat.

* Cubic Feet Per Minute

Wired Wall Timer

Countdown wall timer allows you to set the shut off time of your fireplace in 30 minute increments with two hour maximum time limit. Ideal for rentals, apartments, and commercial applications.

Ember-Glo™

Ember-Glo™ combines adjustable halogen under-lighting with colored glass and embers to provide an amazingly realistic ember bed effect. Controlled manually by a rheostat.



ProBuilder 36 Clean Face Deluxe

High Definition
Classic Oak 10 Piece
Log Set



High Definition
Birch 10 Piece
Log Set



Standard Features

- Choice of Two 10 Piece High Definition Log Sets
- Continuous Pilot or GreenSmart® Ignition Modes
- 110 V Power Required, Built-in Battery Backup
- All Functions Are Controlled From the GreenSmart® Remote
- Ember-Glo™ Halogen Under-lit Accent Light
- 180 CFM Variable Speed Convection Fan

Performance

- BTU Input Range: 5,000 to 25,000 NG
6,000 to 24,000 LP
- Burner Turn Down: 70%
- P4 Efficiency: 74.78% NG 76.41% LP
- Steady State Efficiency: Up to 83.81% NG, 85.88% LP

GreenSmart® Features

GreenSmart® Multi-Function Wireless Thermostat Remote Control



- Thermostat and Smart Thermostat Modes
- Flame Adjustment (6 Levels)
- Change Between GreenSmart® and Continuous Pilot Modes
- Fan Operation
- Ember-Glo™ ON/OFF
- Comfort Control™ ON/OFF

GreenSmart® Multi-Function Controls



Manual Setting

ON/OFF and all other features.

Thermostat Setting

Fireplace turns ON or OFF to maintain your desired home/room temperature.

Smart Thermostat Setting

Fire height will adjust automatically (up, down or OFF) to maintain your temperature while allowing you to view the fire more often. A greener way to heat.



Flame Adjustment

Adjust the height/heat of the flame.
6 levels of flame heights to choose from in manual mode.

Ember-Glo™

Ember-Glo™ combines adjustable halogen under-lighting with colored glass and embers to provide an amazingly realistic ember bed effect. Brightness is controlled by a manually set rheostat.



Comfort Control™

Turn off the back burner to lower the BTU input (up to 70%). This allows you to burn less gas on milder days when you want to enjoy a fire and not overheat your living area.



Convection Fan

Circulate room air around the firebox and deliver heated air into your home.
Six speeds to choose from.


IMAGINATIVE ADDITIONS = INSPIRED SPACES

OPTIONAL FIREBACKS

Personalize the inside of your fireplace with one of our fireback options.



Classic Brick Fireback

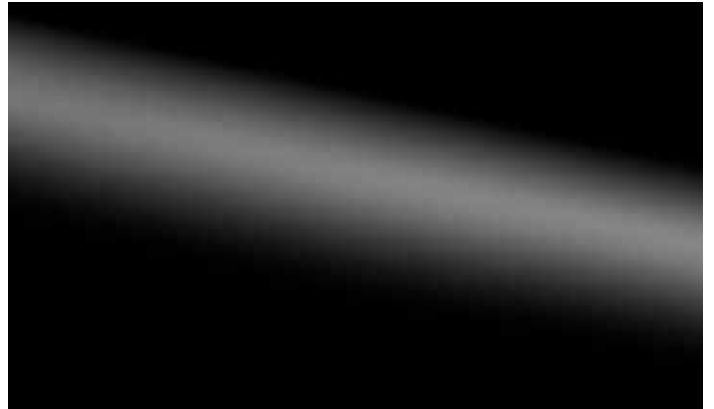

High Gloss Black Glass Fireback

CUSTOM SHOP MANTELS

Add a bold statement to your fireplace with one of our unique, hand-crafted mantels that are designed and created by our in-house artists. These non-combustible mantels come in both 5' and 6' lengths and can also be used as a hearth.



Polished Gray Concrete Mantels

Individually crafted to expose a smooth, diamond-polished quartz surface that offers a bold, contemporary look.



Hand-Hewn Timber Mantels

Fiber reinforced cast concrete copies of real 150 year old fir timber that have been individually hand-painted to feature incredibly realistic, wood-like detailing. Optional Hand-Hewn Timber Legs are available with the 6' mantel.




Clean Cut Cedar Mantels

Fiber reinforced cast concrete reproductions of real clean cut cedar that have been individually hand-painted to feature incredibly realistic cedar detailing.

CoolSmart TV Wall™

The CoolSmart system is designed to redirect the convective heat of the fireplaces from the front of the unit, just above the glass, to a location higher on the wall. The use of this kit allows for reduced clearance to combustibles and accommodates TV installations closer to the fireplace or in recessed cavities (up to 3-1/2") above the fireplace.

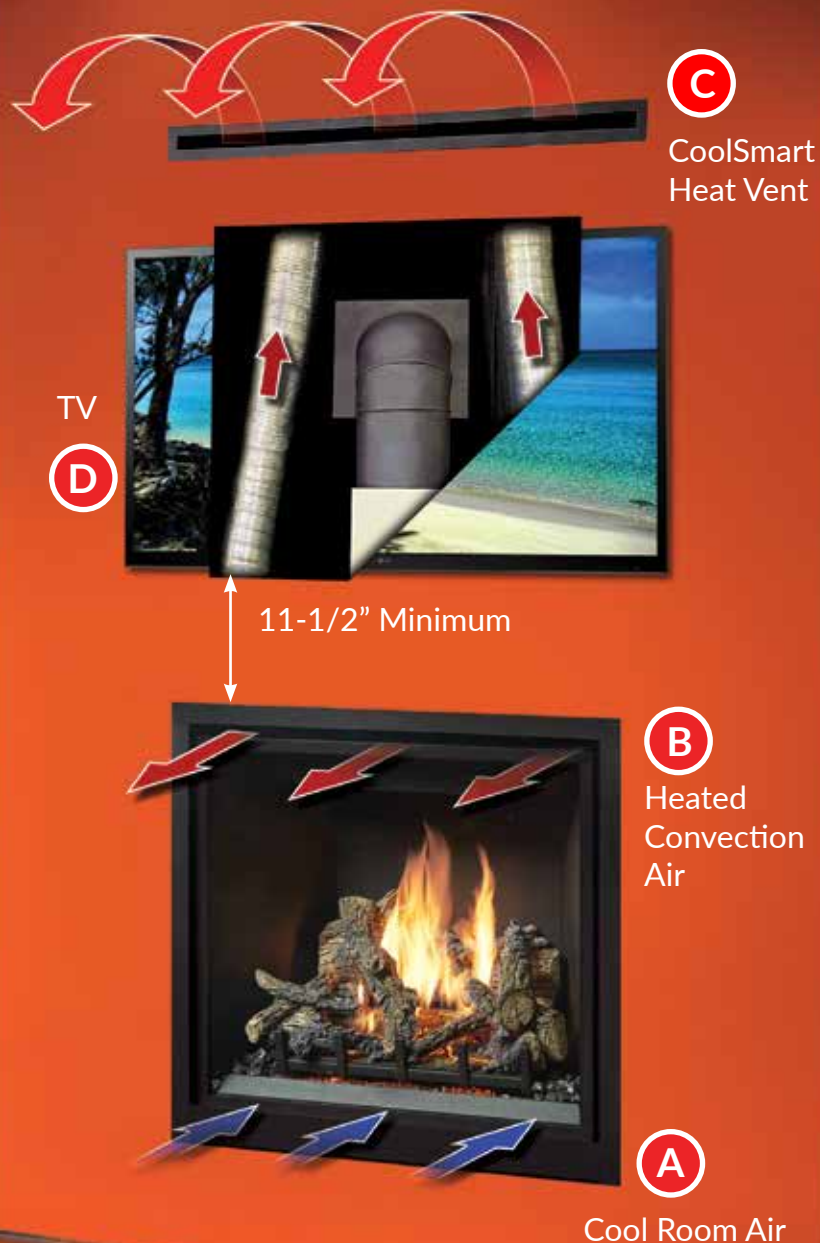


**FEATURING THE ONLY TV WALL SYSTEM THAT
ALLOWS THE USE OF A CONVECTION FAN!**

- (A) Cool room air is naturally pulled into the bottom of the convection chamber surrounding the firebox.
- (B) If the convection fan is present and turned on, a major portion of the heated air is returned to the room above the glass viewing area.
- (C) If there is no convection fan present or if the fan has been turned off, heated convection air is naturally drawn up through the CoolSmart Vent and returned to the room above the TV. Cool room air is also pulled into the upper convection chamber (B), further reducing the temperature of the wall.
- (D) The CoolSmart™ TV Wall allows a TV to be safely placed above the fireplace (minimum distance 11-1/2")


INSTALLATION

NOTE: ALWAYS REFER TO THE PRODUCT OWNER'S MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS. FAILURE TO DO SO CAN RESULT IN VOIDING OF THE WARRANTY AND PRESENT A POTENTIAL SAFETY HAZARD! MANUAL CAN BE FOUND AT WWW.FIREPLACEX.COM


DIMENSIONS

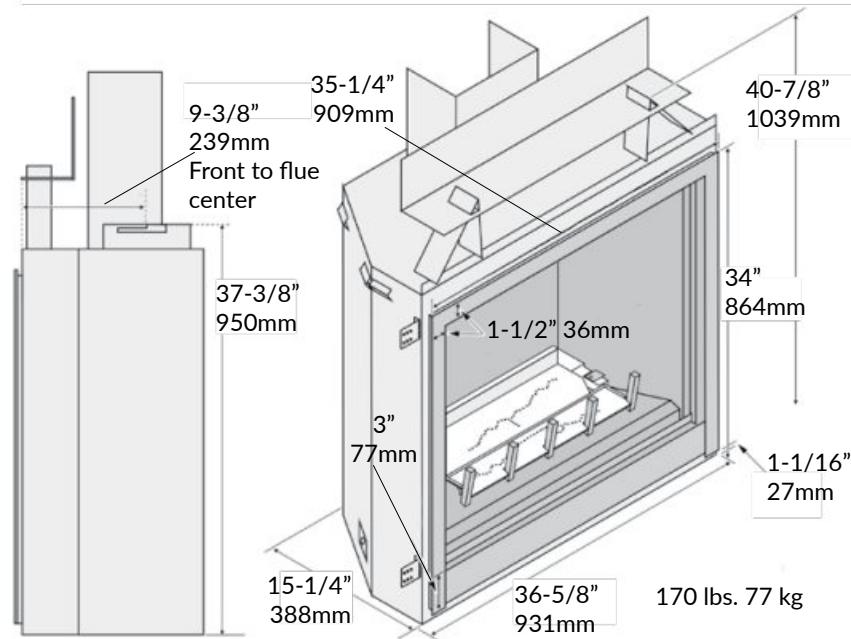


MINIMUM FRAMING

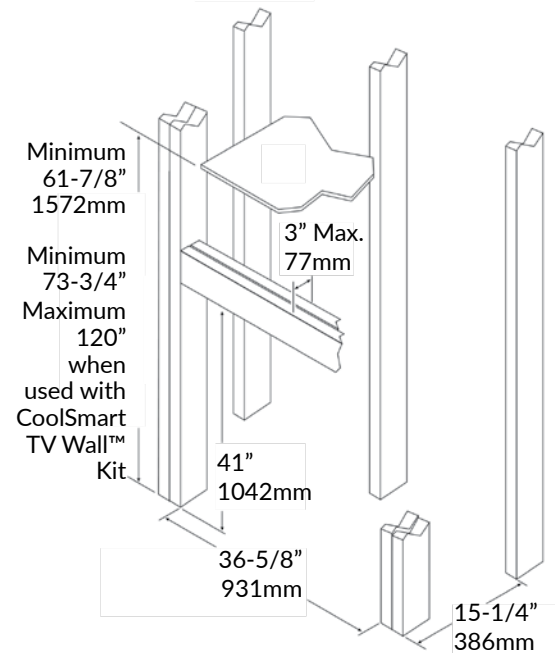

CLEARANCE TO COMBUSTIBLES

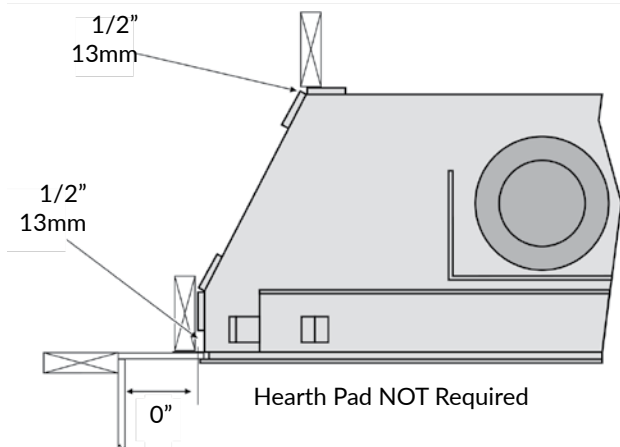

CORNER INSTALLATION

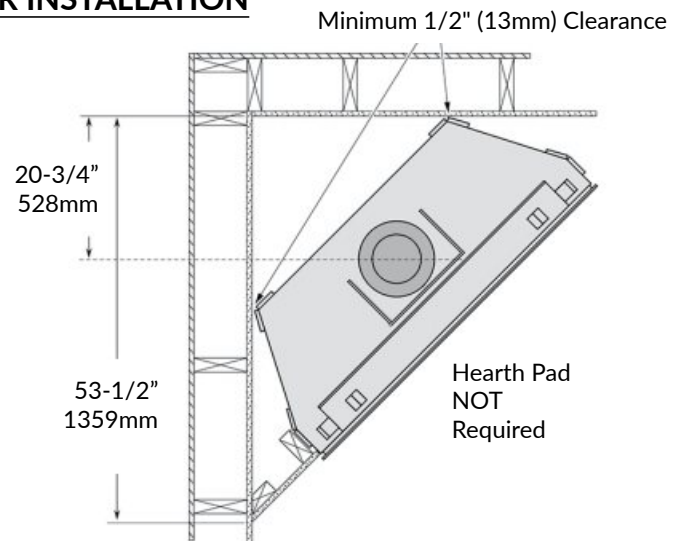


Warranty

Your gas fireplace is backed by a network of Specialty Hearth Dealers and certified factory trained installers. FireplaceX® warrants our products to be free from defects in materials and workmanship for a period up to seven years from the date of purchase. All parts, electronics (except light bulbs), and labor are covered for a full two years. Trims are covered for a period of two years. No other manufacturer's warranty can compare.

Tested and List by Omni-Test Laboratories, Inc. Portland, Oregon to ANSI Z21.88-2016, CSA 2.33-2016 and CSA 2.17-2017



Manufactured in Mukilteo, WA
See our complete line of fireplaces
online: fireplacex.com



We reserve the right to change and improve our product at any time without prior notification. Please refer to the Owner's Installation Manual for complete installation requirements. Photos and illustrations are for descriptive purposes only. Fireplace Xtrordinaire® Gas Fireplaces are protected by one or more of the following patents; U.S. 8,469,021, 7,066,170, 6,602,068, 6,443,726, 6,953,037; Canada 2755517 as well as other U.S. and Foreign Patents Pending. - Copyright © 09/2018 #98800862