

INSERTS

DIRECT VENT GAS FIREPLACE INSERTS

HEAT & GLO®



GAS INSERTS

INSPIRED INNOVATION. You don't have to sacrifice the warmth and glow of a wood burning fireplace for the simplicity and ease of gas. No more drafty, dated fireplace with messy maintenance, soot and smoke. Heat & Glo gas inserts fit inside an existing masonry or manufactured wood burning fireplace, providing an instant upgrade. Warm up to greater performance, safety and convenience.

FIRE MADE
EASY

ESCAPE-30 Firebrick* shown with Chateau Forge front

AN INSTANT UPGRADE



NO MESS. NO HASSLE.

ESCAPE

STANDARD FEATURES

- 30" and 35" viewing areas
- Up to 40,000 BTUs
- IntelliFire™ Touch ignition system with advanced remote control
- Six hand-painted oak-style logs
- Anti-reflective glass
- ClearVue™ screen
- Patented FireBrick® seamless interior
- Five front designs
- Three surround sizes
- Illuminated ember bed
- Fan

SUPREME

STANDARD FEATURES

- 25", 30" and 35" viewing areas
- Up to 35,000 BTUs
- IntelliFire Touch ignition system with advanced remote control
- Ceramic glass with basic screen
- Ceramic fiber logs:
 - Five logs for 25" and 30" inserts
 - Six logs for 35" insert
- Three front designs*
- Three surround sizes
- Fan

OPTIONAL FEATURES

- Interior panels
- Accent Lighting (30" and 35" only)

PROVIDENT

STANDARD FEATURES

- 30" and 35" viewing areas
- Up to 32,700 BTUs
- IntelliFire ignition system
- Ceramic glass with basic screen
- Four ceramic fiber logs
- One front design*
- Three surround sizes

OPTIONAL FEATURES:

- Interior panels
- Remote
- Fan

*Inside fit front available for use with custom surrounds that are smaller than a standard overlap door

BEST



BETTER



GOOD



COSMO

- 30" and 35" viewing areas
- Up to 30,000 BTUs
- IntelliFire Touch ignition system with advanced remote control
- Three front designs*
- Three surround sizes
- Fade resistant fluted black glass
- Six glass media options (required for install)
- Fan

*Inside fit front available for use with custom surrounds that are smaller than a standard overlap door

TRANSITIONAL OR MODERN

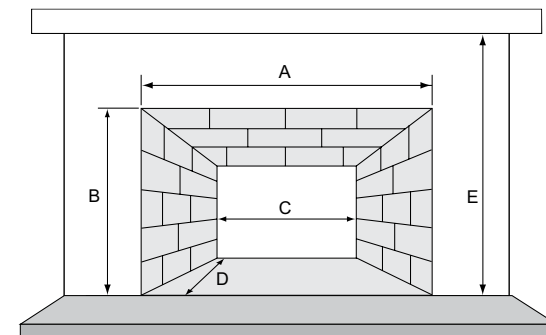


THREE EASY STEPS TO UPGRADE YOUR EXISTING WOOD-BURNING FIREPLACE:

STEP 1: MEASURE YOUR EXISTING FIREPLACE AND SELECT YOUR INSERT.

The height, width and depth of the existing fireplace opening is needed to ensure selection of an appropriately-sized insert:

- A. Fireplace front width _____ E. Hearth to mantel height _____
- B. Fireplace front height _____
- C. Fireplace back width _____
- D. Fireplace depth _____
- If you have a manufactured wood burning fireplace, measure from the inside of the fireplace opening, not the outside trim.

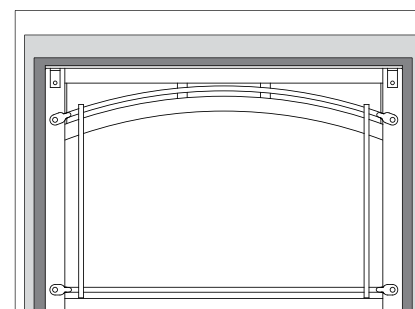


STEP 2: SELECT YOUR FRONT AND SURROUND

Personalize your gas insert with a front and finish that fits your style. Include a surround to fill the gap between the gas insert and existing fireplace opening. Choose from three sizes and three finishes for a unique look.

SURROUND	ESCAPE-35-IFT SUPREME-I35-IFT COSMO-I35-IFT	ESCAPE-30-IFT SUPREME-I30-IFT COSMO-I30-IFT	SUPREME-I25-IFT
Small	42" x 29"	40" x 27"	35" x 23"
Medium	44" x 32"	42" x 30"	37" x 26"
Large	48" x 32"	44" x 32"	39" x 28"

- ☒ SMALL SURROUND
- ☐ MEDIUM SURROUND
- ☐ LARGE SURROUND



BLACK

NEW BRONZE

GRAPHITE

STEP 3: SELECT YOUR OPTIONS

Choose from our collection of fronts, interior panels, interior media to put the finishing touches on your insert.

GAS INSERTS

FRONT OPTIONS

BEST ESCAPE



CHATEAU FORGE Available in hand-crafted, hammered steel.



GALLERIA Available in black, new bronze or graphite.



HALSTON Available in black, new bronze or graphite.



IRON AGE Available in black, new bronze or graphite.



FIRESCREEN Available in black, new bronze or graphite.

BETTER SUPREME



HALSTON ARCH Available black, new bronze or graphite.



IRON AGE Available in black, new bronze or graphite.



FIRESCREEN Available in black, new bronze, graphite or gray.

BLACK

NEW BRONZE

GRAPHITE

GRAY

HAMMERED STEEL

GOOD PROVIDENT



FIRESCREEN Available in black, new bronze, graphite or gray.

TRANSITIONAL OR MODERN COSMO



HALSTON ARCH Available black, new bronze or graphite.



IRON AGE Available in black, new bronze or graphite.



FIRESCREEN Available in black, new bronze, graphite or gray.

INSIDE FIT Available in black for Supreme, Provident and COSMO for installations that require a front smaller than a standard overlap door.

INTERIORS

ESCAPE



FIREBRICK SEAMLESS INTERIOR (Standard)

SUPREME AND PROVIDENT



BLACK METAL (Standard)
STRATFORD TEXTURED BRICK (Optional upgrade on Supreme and Provident)
TRANQUIL GREIGE HERRINGBONE BRICK (Optional upgrade on Supreme)
REFLECTIVE BLACK GLASS (Optional upgrade on Supreme)

COSMO



FLUTED BLACK GLASS (Standard)
REFLECTIVE BLACK GLASS (Optional)

COSMO INTERIOR OPTIONS

Customize your fire. Each distinctive option highlights the flames differently. Glass media required for installation.



CLEAR GLASS
EBONY GLASS
AMBER GLASS
COBALT GLASS
SCARLET GLASS
ICED FOG GLASS
CERAMIC RIVER ROCK STONES (Optional)
DRIFTWOOD LOGS (Optional)

CONTROLS



ESCAPE, SUPREME AND COSMO : INTELLIFIRE TOUCH RC400 TOUCHSCREEN REMOTE CONTROL
Features: on/off, flame height adjustment, fan speed, lights adjustment, thermostat mode, room temperature readout, child lock, timer mode, battery backup, cold climate mode and wall docking station.

-OR-



INTELLIFIRE TOUCH RC150 WALL SWITCH
Features: on/off, battery strength indicator, battery backup and cold climate mode.



PROVIDENT : SMARTREMOTE (Optional)
Features: on/off, timer mode, thermostat mode, room temperature readout

TERMINATION CAPS

A termination cap finishes your gas insert with a clean, upscale look. These durable caps also protect venting components and ensure safe exhaust flow.



ROUND CAP



SQUARE CAP
Available in black or copper finish



Escape-35 Firebrick
insert shown with
Halston front in new bronze



COSMO-35 metal insert shown with Halston Arch front in bronze, fluted glass interior and glass media



ESCAPE-30 Firebrick insert shown with Galleria front in bronze



SUPREME-25 metal insert shown with Iron Age front in black and Tranquil Greige herringbone interior



Provident-30 metal insert shown with Firescreen front in black and metal interior

TECHNOLOGIES



INTELLIFIRE TOUCH IGNITION SYSTEM
IntelliFire Touch is the most advanced and intuitive IntelliFire system, making operating your fireplace simple, smart and safe.



INTELLIFIRE IGNITION SYSTEM (IPI)
IntelliFire features intermittent-pilot ignition (IPI) allowing you to conserve fuel and money when the fireplace is not in use.



DIRECT VENT TECHNOLOGY
Direct Vent gas inserts remove 100% of combustion exhaust and fumes to the outside of the home. These sealed fireplaces provide optimal heat, conserve energy and ensure clean, safe indoor air quality.



FIREBRICK TECHNOLOGY
Available on Escape inserts, FireBrick is a patented, energy-saving ceramic material molded in an authentic masonry design. FireBrick produces up to 25% more radiant heat than metal fireboxes—heating rooms faster and using less fuel. This increases efficiency and reduces heating costs. A unique ceramic composition is at the core of the FireBrick innovation.



STANDARD FEATURE COMPARISON

PACKAGE	MODEL	IGNITION SYSTEM	FRONT DESIGN OPTIONS	VIEWING AREA	FAN	REMOTE CONTROL	THERMOSTAT CONTROL	INTERIOR PANELS	ACCENT LIGHTING
BEST	ESCAPE 30"/35"	IntelliFire Touch	5	Anti-reflective glass with ClearVue screen	Yes	Advanced RC400	Yes	Patented Fire-brick	Yes
BETTER	SUPREME 25"/30"/35"	IntelliFire Touch	3*	Ceramic glass with basic screen	Yes	Advanced RC400	Yes		
GOOD	PROVIDENT 30"/35"	IntelliFire (IPI)	1*	Ceramic glass with basic screen					
TRANSITIONAL OR MODERN	COSMO 30"/35"	IntelliFire Touch	3*	Ceramic glass with basic screen	Yes	Advanced RC400	Yes	Fluted Reflective Black Glass	

*Inside fit front is available for installations that require a custom surround that is smaller than a standard overlap door.

EFFICIENCIES

EnerGuide (CSA P.4.1-15)
Used in Canada and some US states to measure annual fireplace efficiency.





MODEL	RATING
ESCAPE-35-IFT	72.90% (NG), 73.80% (LP)
ESCAPE-30-IFT	70.70% (NG), 71.10% (LP)

MODEL	RATING
SUPREME-I35	71.61% (NG), 71.20% (LP)
SUPREME-I30	70.91% (NG), 71.00% (LP)
SUPREME-I25	68.01% (NG), 66.00% (LP)





MODEL	RATING
PROVIDENT-I35	74.80% (NG), 74.40% (LP)
PROVIDENT-I30	67.70% (NG), 70.10% (LP)

MODEL	RATING
COSMO-I35	72.01%(NG), 69.20% (LP)
COSMO-I30	69.81% (NG), 69.00% (LP)

ESCAPE SPECIFICATIONS

MODEL	FRONT WIDTH (A)		BACK WIDTH (B)		HEIGHT (C)		DEPTH (D)		GLASS SIZE (E X F)	BTU/HOUR INPUT (NG)	CONVECTION BLOWER
	UNIT	MIN. FIREBOX OPENING	UNIT	MIN. FIREBOX OPENING	UNIT	MIN. FIREBOX OPENING	UNIT	MIN. FIREBOX OPENING			
ESCAPE-35-IFT	34-5/8 [879]	35-1/8 [892]	25 [635]	25-1/2 [648]	24-3/8 [619]	24-5/8 [625]	17-7/8 [454]	18-1/8 [460]	31-3/8 x 19-7/8 [797 x 505]	40,000	120 CFM
ESCAPE-30-IFT	30 [762]	30-1/2 [775]	21 [533]	21-1/2 [546]	22-3/8 [568]	22-5/8 [575]	16-3/8 [410]	16-5/8 [422]	26-11/16 x 17-7/8 [678 x 454]	36,000	120 CFM
LEFT SIDE VIEW  FRONT VIEW  TOP VIEW  RIGHT SIDE VIEW 											

SUPREME, COSMO & PROVIDENT SPECIFICATIONS

MODEL	FRONT WIDTH [A]		BACK WIDTH [B]		HEIGHT [C]		DEPTH [D]		GLASS SIZE [E X F]	BTU/HOUR INPUT (NG)	CONVECTION BLOWER
	UNIT	MIN FIREBOX OPENING	UNIT	MIN. OPEN	UNIT	MIN FIREBOX OPENING	UNIT	MIN FIREBOX OPENING			
SUPREME-I25-IFT	26-1/8" [664mm]	26-5/8" [676mm]	14-5/8" [372mm]	15-1/8" [384mm]	17-1/16" [433mm]	17-5/16" [439mm]	14-1/2" [368mm]	15" [381mm]	22-1/2" X 12-7/16" [572mm X 316mm]	27,000	160 CFM
SUPREME-I30-IFT	31-1/8" [791mm]	31-5/8" [803mm]	19-5/8" [499mm]	20-1/8" [511mm]	20-3/4" [527mm]	21" [533mm]	14-1/2" [368mm]	15" [381mm]	27-1/2" X 15-15/16" [699mm X 405mm]	32,700	160 CFM
SUPREME-I35-IFT	36-1/8" [918mm]	36-5/8" [930mm]	24-5/8" [626mm]	25-1/8" [638mm]	24" [610mm]	24-1/4" [616mm]	14-1/2" [368mm]	15" [381mm]	32-1/2" X 19-3/8" [826mm X 492mm]	35,000	160 CFM
PROV-I30-IPI	31-1/8" [791mm]	31-5/8" [803mm]	19-5/8" [499mm]	20-1/8" [511mm]	20-3/4" [527mm]	21" [533mm]	14-1/2" [368mm]	15" [381mm]	27-1/2" X 15-15/16" [699mm X 405mm]	30,000	160 CFM
PROV-I35-IPI	36-1/8" [918mm]	36-5/8" [930mm]	24-5/8" [626mm]	25-1/8" [638mm]	24" [610mm]	24-1/4" [616mm]	14-1/2" [368mm]	15" [381mm]	32-1/2" X 19-3/8" [826mm X 492mm]	32,700	160 CFM
COSMO-I30-IFT	31-1/8" [791mm]	31-5/8" [803mm]	19-5/8" [499mm]	20-1/8" [511mm]	20-3/4" [527mm]	21" [533mm]	14-1/2" [368mm]	15" [381mm]	27-1/2" X 15-15/16" [699mm X 405mm]	28,000	160 CFM
COSMO-I35-IFT	36-1/8" [918mm]	36-5/8" [930mm]	24-5/8" [626mm]	25-1/8" [638mm]	24" [610mm]	24-1/4" [616mm]	14-1/2" [368mm]	15" [381mm]	32-1/2" X 19-3/8" [826mm X 492mm]	30,000	160 CFM
LEFT SIDE VIEW  FRONT VIEW  TOP VIEW  RIGHT SIDE VIEW 											

Dimensions above are in inches. Reference dimensions only. We recommend measuring individual units at installation. NOTE: Combustible material should not be installed over the face. Make sure you do NOT cover the decorative door opening. Refer to installation manual for detailed specifications on installing this product. Heat & Glo reserves the right to update units periodically. The flame and ember appearance may vary based on the type of fuel burned and the venting configuration used. Pictures in this brochure are not a true representation of the fireplace and/or flames.

For complete information on these models, please contact us at:

HEAT & GLO
No one builds a better fire

Web: heatnglo.com
Phone: (888) 427-3973
E-mail: info@heatnglo.com

 facebook.com/HeatandGlo
 twitter.com/HeatandGlo
 youtube.com/HeatandGlo

HNG-1142U-1119

LIMITED LIFETIME WARRANTY²

The strongest in the industry, Heat & Glo® provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

²For full warranty details, go to www.heatnglo.com.

Fireplace glass and other surfaces get extremely HOT and can cause severe burns if touched. Do not remove the protective safety screen from the front of the glass. Keep a safe distance away. To learn more visit www.heatnglo.com/fireplacesafety

