

MEZZO

DIRECT VENT GAS FIREPLACE

HEAT & GLO





MEZZO

You've never experienced modern design like this. Clean. Discreet. Luxurious. We spared nothing, to give you everything. It's modern design, redefined.

DETAILS MATTER

In clean modern design, it's all about the details. No gaps. Clean finishing. And quality. Every corner, every edge and every element of the MEZZO is all about perfection.

ELEVATE THE SENSES

Flames, lights, reflections and warmth combine to stimulate the senses. Flames spread across an illuminated bed of crushed glass. And a black glass interior adds depth and intensity to the fire. We dare you to take your eyes off of it.

DEFINE YOUR DESIGN

Your style, is yours. Express it by mixing and matching fronts, finishes and interior options to create a MEZZO uniquely yours.

MEZZO 36 using Passive Heat kit, shown with clean face trim in stainless steel and crystal glass media with driftwood logs and river rock stones.





MEZZO 60 shown with clean face trim in black and ebony glass media.

SINGLE-SIDED



SEE-THROUGH



MODELS AVAILABLE

Choose a model to fit your space and application.

FRONT OPTIONS



QUATTRO¹

An elegant four-piece design softly framing the view of the fire. Available in black or new bronze.



CLEAN FACE TRIM

A low-profile trim for a minimalist look. Also pairs well with custom wall treatments like stone or tile. Available in black, new bronze or stainless steel.



LOFT FORGE¹

Hand-forged metal with riveted accents for an industrial aesthetic. At home in a rustic cabin or modern loft. Available in hammered steel only.

INTERIOR OPTIONS



CRYSTAL GLASS

EBONY GLASS

AMBER GLASS

COBALT GLASS

SCARLET GLASS

ICED FOG GLASS

NATURAL LOGS³

DRIFTWOOD LOGS³

RIVER ROCK STONES³

1: Not available for 72-inch model 2: Quattro Front available in black and new bronze only. Loft Forge front available in hammered steel only.
3: Requires glass media



MEZZO 48 See-Through using Passive Heat kit, shown with loft forge front, natural logs and iced fog media.

MEZZO TECHNOLOGIES



INTELLIFIRE TOUCH® IGNITION SYSTEM

The most advanced and intuitive IntelliFire system makes operating your fireplace simple, smart and safe. Select the touchscreen remote control or wireless wall switch for the solution that fits your life.

RC400 INTELLIFIRE TOUCH TOUCHSCREEN REMOTE CONTROL

Features: on/off, flame height adjustment, fan speed, lights adjustment, thermostat mode, room temperature readout, child lock, timer mode, battery backup, cold climate mode, power vent, wall docking station.



RC150 INTELLIFIRE TOUCH WIRELESS WALL SWITCH

Features: on/off, battery backup cold climate mode, battery strength indicator.



DIRECT VENT TECHNOLOGY

Direct Vent fireplaces remove 100% of combustion exhaust and odors outside of the home. These sealed fireplaces provide optimal heat, conserve energy and ensure clean, safe indoor air quality.



CLEAR LED LIGHTING TECHNOLOGY

Superior performance and extended efficiency. This technology provides high-contrast, brilliant lighting to accentuate the flames. Can be used as mood lighting, with or without the flames.



FADE-RESISTANT BLACK GLASS INTERIOR

A clean modern look never gets dull. Just like this black glass interior. It's hot. And looks that way, too. For the life of your MEZZO.

HEAT MANAGEMENT SOLUTIONS

Bring the warmth from your fireplace to the rest of your home, up to 20 feet away. Heat management solutions can redirect up to 50% of the heat to another area, and reduce wall temperatures above the fireplace. Choose between:

- **HEAT-ZONE® KIT** to transfer heat where you want it
- **HEAT-OUT® KIT** to redirect heat from the fireplace outside the home
- **PASSIVE HEAT KIT** allows heat to naturally rise and disperse at ceiling height without the use of a fan. This enables a TV or heat sensitive materials to be placed just 12" above fireplace opening without a mantel. Choose side, front or open wall register.



Passive Heat Side Register




Passive Heat Front Register



Passive Heat Open Wall Register (opening 2" from ceiling)

SPECIFICATIONS

MODEL	FRONT WIDTH		BACK WIDTH		HEIGHT		DEPTH		GLASS SIZE	BTU/HOUR INPUT (NG)
	UNIT	FRAMING	UNIT	FRAMING	UNIT	FRAMING	UNIT	FRAMING		
MEZZO36, MEZZO36ST	46-3/16 [1173]	48-1/4 [1226]	46-3/16 [1173]	48-1/4 [1226]	41-3/4 [1060]	42 [1067]	17-1/8 [435]	18-1/4 [464] ST: 17 [432]	35-1/2 x 12-1/2 [908 x 318]	17,500 - 30,000
MEZZO48, MEZZO48ST	58 [1473]	60-1/4 [1530]	58 [1473]	60-1/4 [1530]	41-3/4 [1060]	42 [1067]	17-1/8 [435]	18-1/4 [464] ST: 17 [432]	47-1/2 x 12-1/2 [1207 x 318]	21,000 - 40,000
MEZZO60, MEZZO60ST	70 [1778]	72-1/4 [1835]	70 [1778]	72-1/4 [1835]	47-3/4 [1213]	48 [1219]	17-1/8 [435]	18-1/4 [464] ST: 17 [432]	59-1/2 x 12-1/2 [1511 x 318]	26,000 - 50,000
MEZZO72, MEZZO72ST	82 [2083]	84-1/4 [2140]	82 [2083]	84-1/4 [2140]	47-3/4 [1213]	48 [1219]	17-1/8 [435]	18-1/4 [464] ST: 17 [432]	71-1/2 x 12-1/2 [1861 x 318]	30,000 - 58,000

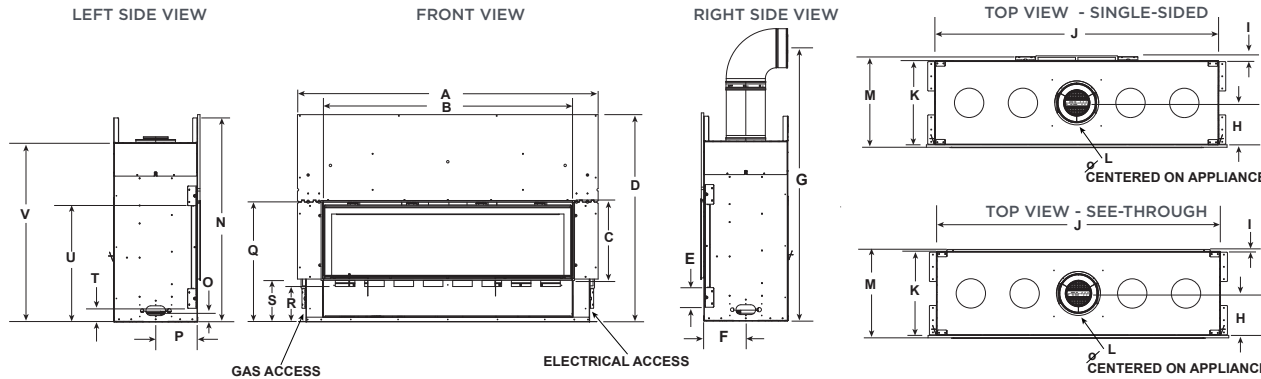

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V
MEZZO36, MEZZO36ST	49-1/2 [1257] ST: 50 [1270]	39-1/4 [997]	15-5/8 [397]	42-1/2 [1080]	4 [102]	8-9/16 [217]	63 [1600]	8-9/16 [217]	1 [25] ST: 1/2 [13]	46-3/16 [1173]	17-1/8 [435]	8 [203]	18-5/8 [473] ST: 18-1/8 [460]	41-3/4 [1060]	2-3/8 [60]	8-9/16 [217]	24-1/2 [622]	7-1/4 [184]	8-7/8 [225]	2-3/4 [70]	23-3/4 [603]	36-5/8 [930]
MEZZO48, MEZZO48ST	61-1/2 [1562] ST: 62 [1575]	51-1/8 [1299]	15-5/8 [397]	42-1/2 [1080]	4 [102]	8-9/16 [217]	63 [1600]	8-9/16 [217]	1 [25] ST: 1/2 [13]	58 [1473]	17-1/8 [435]	8 [203]	18-5/8 [473] ST: 18-1/8 [460]	41-3/4 [1060]	2-3/8 [60]	8-9/16 [217]	24-1/2 [622]	7-1/4 [184]	8-7/8 [225]	2-3/4 [70]	23-3/4 [603]	36-5/8 [930]
MEZZO60, MEZZO60ST	74 [1880]	63-1/8 [1603]	15-5/8 [397]	48-1/2 [1232]	4 [102]	8-9/16 [217]	63 [1600]	8-9/16 [217]	1 [25] ST: 1/2 [13]	70 [1778]	17-1/8 [435]	8 [203]	18-5/8 [473] ST: 18-1/4 [464]	47-3/4 [1213]	2-3/8 [60]	8-9/16 [217]	24-1/2 [622]	7-1/4 [184]	8-7/8 [225]	2-3/4 [70]	23-3/4 [603]	36-1/2 [927]
MEZZO72, MEZZO72ST	86 [2184]	75-1/8 [1908]	15-5/8 [397]	48-1/2 [1232]	4 [102]	8-9/16 [217]	75 [1905]	8-9/16 [217]	1 [25] ST: 1/2 [13]	82 [2083]	17-1/8 [435]	8 [203]	18-5/8 [473] ST: 18-1/4 [464]	47-3/4 [1213]	2-3/8 [60]	8-9/16 [217]	24-1/2 [622]	7-1/4 [184]	8-7/8 [225]	2-3/4 [70]	23-3/4 [603]	36-1/2 [927]

Dimensions are in inches and millimeters. Product information is not complete and is subject to change without notice. Product installation must adhere strictly to instructions shipped with product. We recommend measuring individual units at installation. Assumes the use of 1/2" sheetrock. NOTE: Combustible material should not cover the face. Make sure you do NOT cover the decorative door opening.

Refer to installation manual for detailed specifications on installing this product. Hearth & Home Technologies® reserves the right to update units periodically. The flame and ember appearance may vary based on the type of fuel burned and the venting configuration used. Actual product appearance, including flame, may differ from product images.

For complete information on this model, please contact us at:

HEAT & GLO
No one builds a better fire

Web: heatnglo.com
Phone: (888) 427-3973
E-mail: info@heatnglo.com


[facebook.com/HeatandGlo](https://www.facebook.com/HeatandGlo)
twitter.com/HeatandGlo
[youtube.com/HeatandGlo](https://www.youtube.com/HeatandGlo)

HNG-1134U-1219

LIMITED LIFETIME WARRANTY³

The strongest in the industry, Heat & Glo provides a limited lifetime warranty on the most important aspects: firebox and heat exchanger.

3: For full warranty details see heatnglo.com. Fireplace glass and other surfaces get extremely HOT and can cause severe burns if touched. Do not remove the protective safety screen from the front of the glass. Keep a safe distance away. To learn more visit www.heatnglo.com/fireplace_safety



U.S. EFFICIENCIES

Steady State - Since most homeowners use their fireplaces for an extended time while they are in the room, Steady State measures how efficiently your fireplace converts fuel to heat once it is warmed up and running in a "steady state".

AFUE - AFUE rating is more typically used with appliances, like your furnace, that continually cycle on and off to maintain a constant temperature.

FIREPLACE	STEADY STATE	AFUE
MEZZO36	49.2% (NG), 49.2% (LP)	44.1% (NG), 48.5% (LP)
MEZZO36ST	49.3% (NG), 49.3% (LP)	39.7% (NG), 49.3% (LP)
MEZZO48	57.2% (NG), 57.2% (LP)	46.4% (NG), 56.1% (LP)
MEZZO48ST	58.3% (NG), 58.3% (LP)	48.3% (NG), 57.3% (LP)
MEZZO60	63.0% (NG), 64.1% (LP)	58.0% (NG), 59.7% (LP)
MEZZO60ST	66.3% (NG), 67.7% (LP)	61.1% (NG), 63.3% (LP)
MEZZO72	61.3% (NG), 63.1% (LP)	56.6% (NG), 59.0% (LP)
MEZZO72ST	67.3% (NG), 69.3% (LP)	62.4% (NG), 65.1% (LP)

CANADA EFFICIENCIES

EnerGuide (CSA P.4.1-15) - EnerGuide is a rating used in Canada to measure annual fireplace efficiency.

FIREPLACE	ENERGUIDE (CSA P.4.1-15)
MEZZO36	47.8% (NG), 50.8% (LP)
MEZZO36ST	45.9% (NG), 50.1% (LP)
MEZZO48	53.2% (NG), 56.3% (LP)
MEZZO48ST	51.3% (NG), 57.0% (LP)
MEZZO60	52.6% (NG), 52.2% (LP)
MEZZO60ST	57.4% (NG), 56.1% (LP)
MEZZO72	51.3% (NG), 49.9% (LP)
MEZZO72ST	55.9% (NG), 57.7% (LP)