


CoolSmart TV Wall™

The CoolSmart TV Wall™ system is designed to redirect the convection heat of the ProBuilder Series™ Linear Fireplace from the front of the unit, just above the glass, to a location higher on the wall. The radiant heat from the glass is projected into the room providing additional comfort for your family. This system also allows for the installation of a TV to be recessed into the wall up to 4-1/4" or simply mounted on the wall, all without a mantle, giving your TV a flush wall appearance.



This system allows finish materials, including drywall, to be brought down behind the fireplace screen frame. The CoolSmart TV Wall™ kit does not require a fan due to natural convection flow.

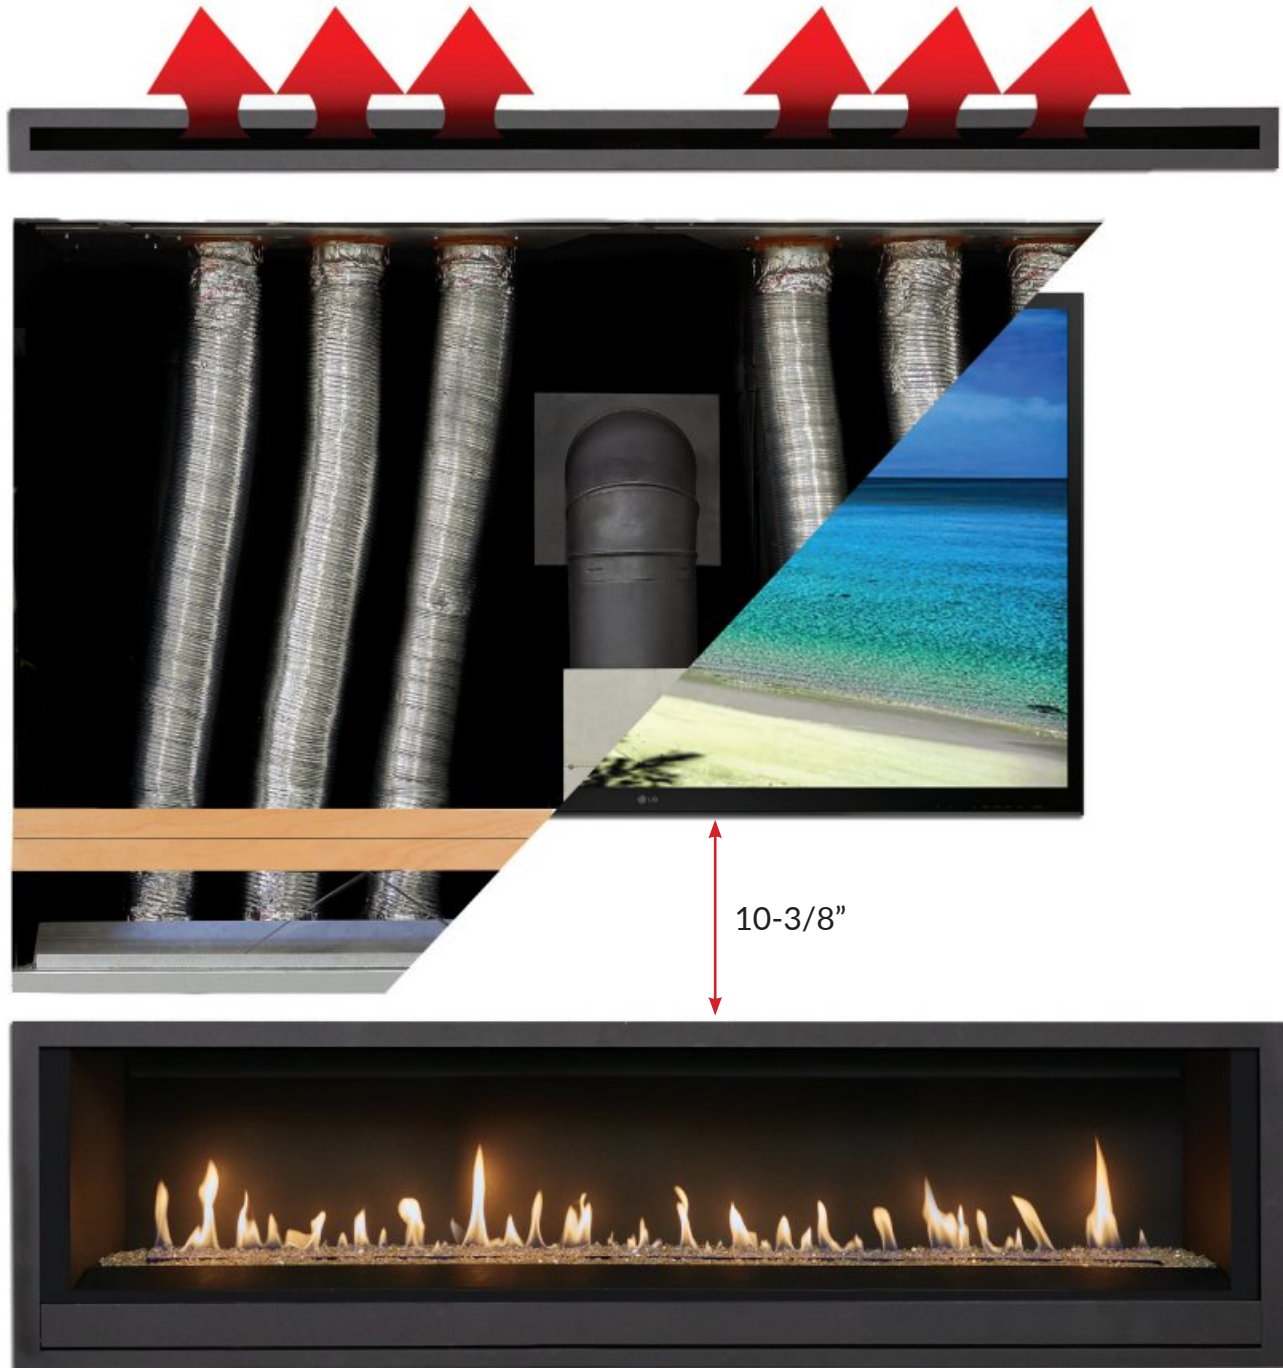


TRAVIS INDUSTRIES
HOUSE OF FIRE

ProBuilder Series CoolSmart TV


(42PB - sku# 98900774)(54PB - sku# 98900775)(72PB - sku# 98900776)

Installation Requirements

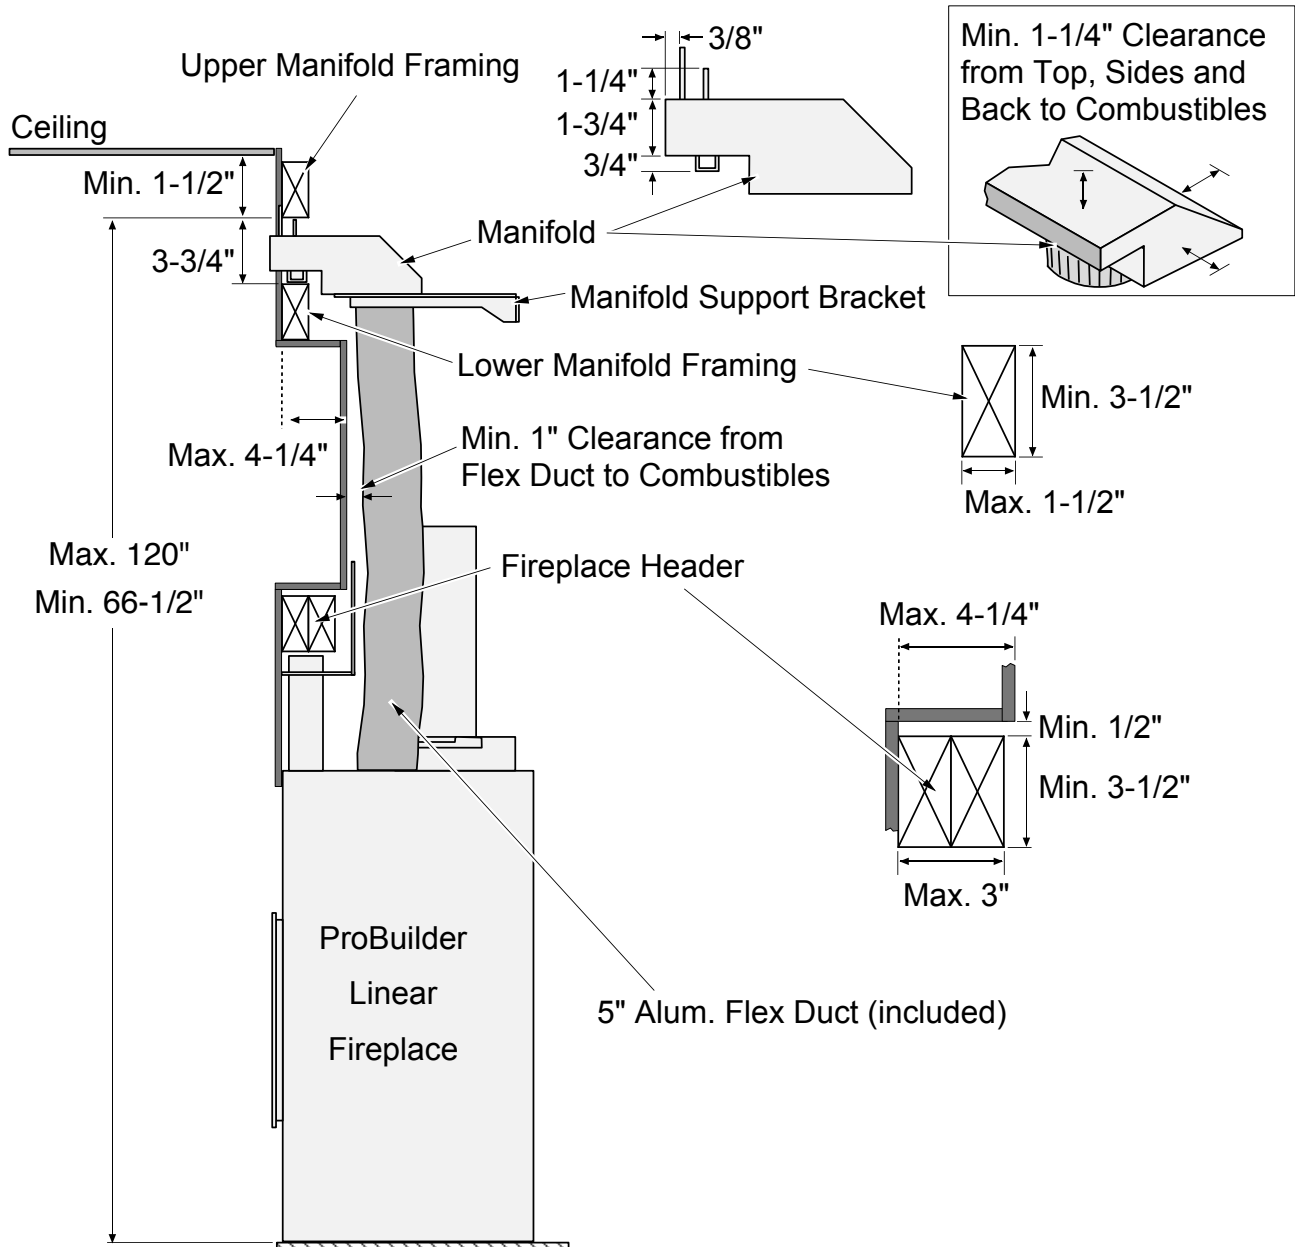

Grill and Manifold Dimensions

The grill may be installed over the facing to provide an aesthetic opening for the convection outlet. (2) 8-32 x 1-1/2" screws attach the trim to the upper manifold. This allows variable thickness of finish material.

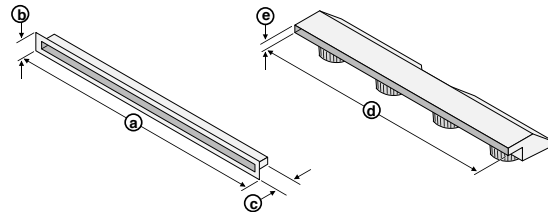

Dimensions

	a	b	c	d	e
PB 42	45"	2-7/8"	1-1/4"	44"	1-3/4"
PB 54	57"	2-7/8"	1-1/4"	56"	1-3/4"
PB 72	75"	2-7/8"	1-1/4"	74"	1-3/4"